



PLASTEC VENTILATION, INC.

www.plastecvent.net Phone: 941-751-7596 Fax: 941-751-7598

Submittal Data and Specifications

Switch

Material of Construction and Temperature Limitations:

UV treated plastic body and switch. Switch recommended up to 140° F.

Application:


Manual motor controller for inside or outside installation.

Manufacturer:

Shall be manufactured under the authority of Plastec Ventilation, Inc.

Shall have the following Features and Benefits:

- Enclosure type NEMA 4X / IP66
- Rated up to 25 AMPs, 3 Pole
- 3 Phase or Single Phase, 50/60Hz
- Suitable as motor disconnect
- UL/CSA listed
- CE approved
- Provides for a lock in the off position for additional safety

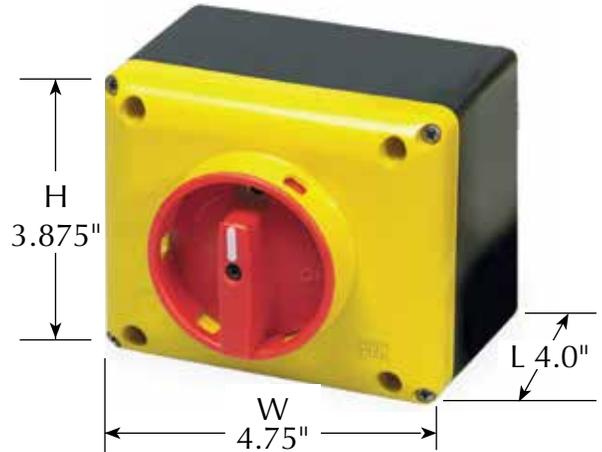

Warranty:

This equipment is warranted to be free from defects in material and workmanship for two years from date of original shipment. For the complete warranty agreement, see I, O & M on www.plastecvent.net.



PROJECT			ARCHITECT
CONTRACTOR	DATE	SUBMITTED BY	ENGINEER
SPECIFICATION			
RELATED FAN POSITION	MODEL #	QTY	NOTES